




PRECAST MOUNTABLE CURB FOR INSTALLATION IN STREETS FOR LANE DELINEATION OR MEDIANS

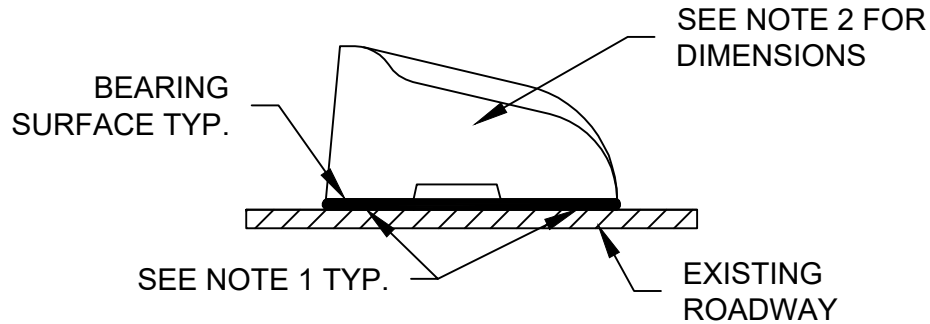

SECTION - SLOPED

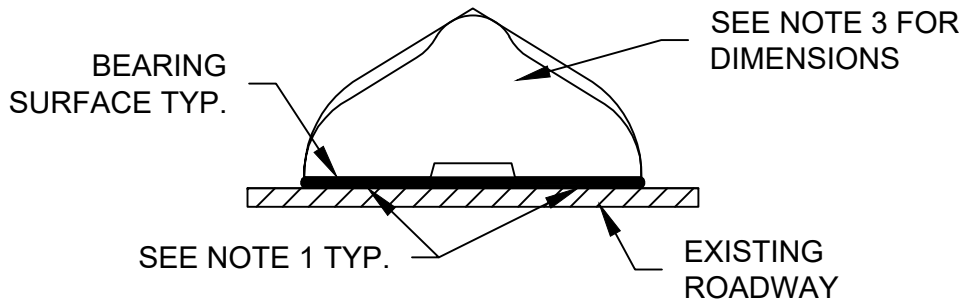

SECTION - DUAL FACED

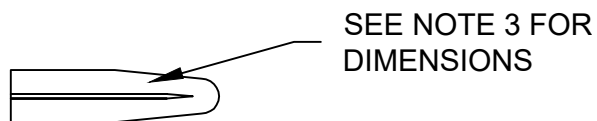

PLAN: NOSING

NOTES:

1. MIXTURE COMPOSED OF 1 PART HYDRATED LIME (TYPE S), 2 PARTS CEMENT, AND 3 PARTS COARSE SAND. APPLY A UNIFORM THICKNESS OF 3/4" TO ALL BEARING SURFACES.
2. DIMENSIONS PER WSDOT STD PLAN F-10.62-02.
3. DIMENSIONS PER WSDOT STD PLAN F-10.64-03.

DRAWING NUMBER	ST-CG-2
SCALE	NONE
REVISION DATE	06/24
DEPARTMENT	PW