


## EXTRUDED CURB FOR INSTALLATION IN PARKING LOTS OR ADJACENT TO STREETS

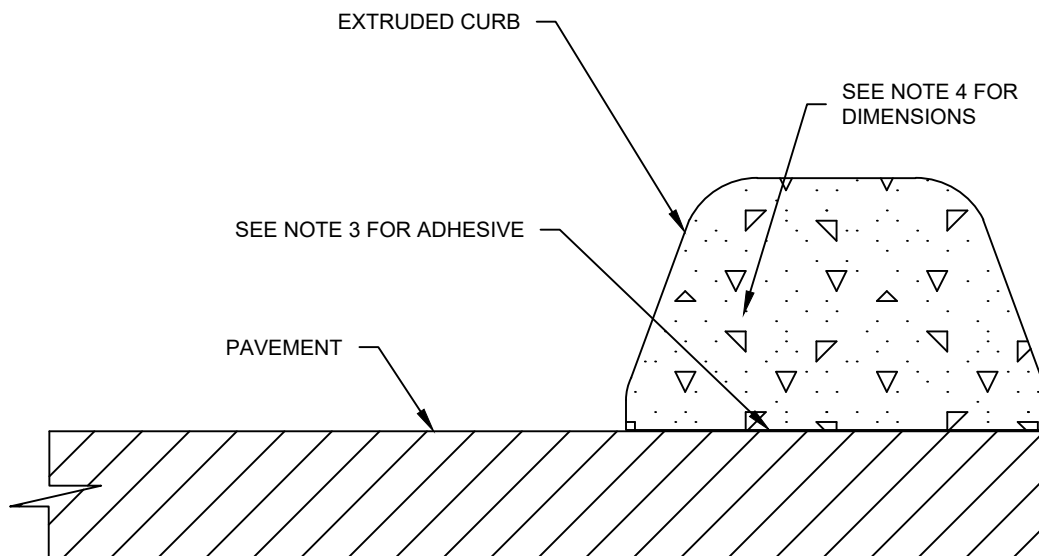

### CEMENT CONCRETE EXTRUDED CURB

**NOTES:**

1. CURB MATERIAL SHALL BE CEMENT CONCRETE
2. JOINT SPACING, FINISHING, CURING, FORM WORK, PLACEMENT AND MATERIALS SHALL CONFORM TO THE CURRENT WSDOT SPECS.
3. CONCRETE CURBS SHALL BE ANCHORED TO THE PAVEMENT BY USING AN ADHESIVE. THE ADHESIVE SHALL MEET THE REQUIREMENTS OF SECTION 9-26 OF THE WSDOT/APWA STANDARD SPECIFICATIONS FOR TYPE II EPOXY RESIN. BAR ANCHORS ARE NOT ALLOWED.
4. USE DIMENSIONS FOR "TYPE 6" PER WSDOT STD PLAN F-10.42-00.



### CEMENT CONCRETE EXTRUDED CURB

ST-CG-3-Cement-Concrete-Extruded-Curb - 05212024.dwg

DRAWING NUMBER	ST-CG-3
SCALE	NONE
REVISION DATE	05/24
DEPARTMENT	PW